SERVICE MANUAL

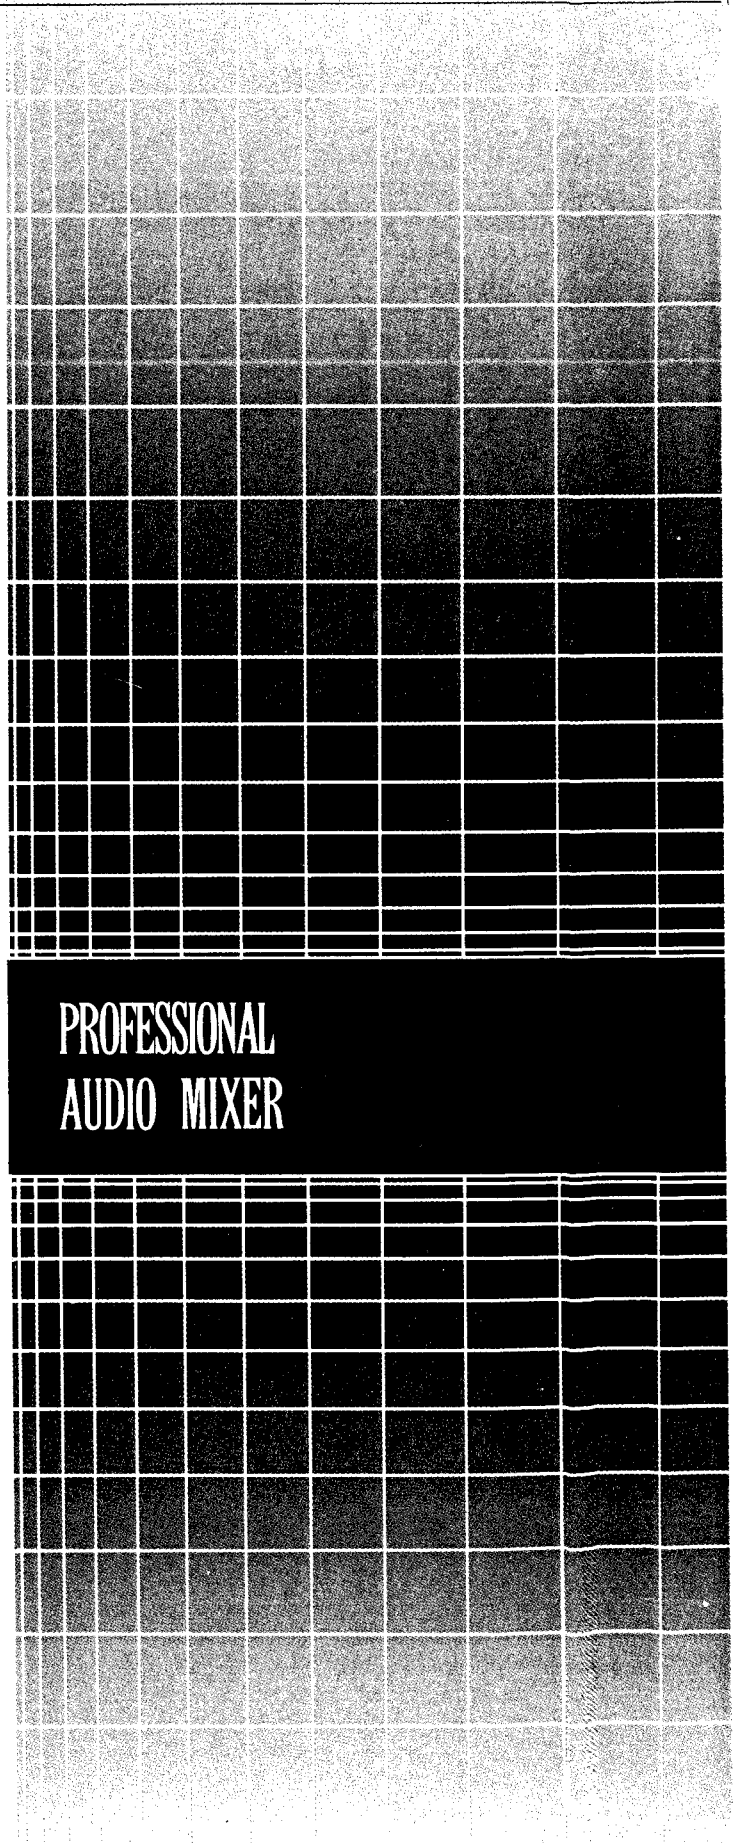

MODEL: MX-1100

INKEL

9007941190

Contents

SPECIFICATIONS 2
ELECTRICAL ADJUSTMENT PROCEDURE 3
PARTS LIST ..... 4 · 5 · 6 · 7
TOP VIEW OF P.C.BOARDS ..... 8 · 9
PARTS LIST ACCORDING TO EXPLODED VIEW 10
EXPLODED VIEW OF CABINET & CHASSIS ..... 11 · 12
SCHEMATIC DIAGRAM ..... 13 · 14
BLOCK DIAGRAM 15

Specifications

Rated Output Voltage	3V
Input Sensitivity	
Mic 1KHz	1mV
Phono 1KHz	2mV
Mic ATT 1KHz	10mV
Line 1KHz	300mV
Aux 1KHz	500mV
Total Harmonic Distortion at 20Hz to 20KHz	
3V Output	0.01%
Frequency Response(—3dB)	20Hz-20KHz
S/N Ratio	
Mic	62dB
Mic ATT	74dB
Line	75dB
Phono(400Hz HPF)	76dB
Aux 1,2	76dB
Tone Control	
High at 10KHz	±15dB
Mid at 3KHz	±12dB
Low at 100Hz	±15dB
Echo Effect	
Delay Time	0.04—0.3 sec
Repeat	1to 10 times
Headphone Output (at 1KHz 8ohm load)	10mW

GENERAL

Power Requirement	AC 100V/120V/220V/240V
Power Consumption	30W
Dimensions	
Table Type	500(W)×372(H)×135(D)mm
Rack Type	483(W)×355(H)×135(D)mm
Weight(Net)	8.5Kg

Electrical Adjustment Procedure

1. OUTPUT LEVEL METER ADJUSTMENT

A. SETTING(Channel 1)

- Input Selector ..... Line
- High Control ..... Center
- Mid Control ..... Center
- Low Control ..... Center
- Mon Control ..... 0 Position
- Echo Control ..... 0 Position
- Pan Control ..... Center
- Input Fader Control ..... Max Position

B. CONNECTION

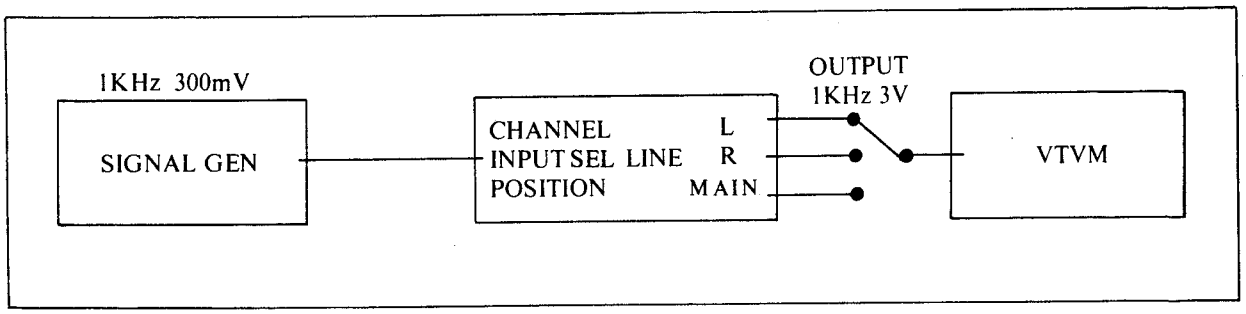

C. ADJUSTMENT

- Apply a 1KHz input signal of 300mV.
- Adjust the master fader so that output voltage becomes 3V .

2. ECHO NOISE ADJUSTMENT

A. CONNECTION

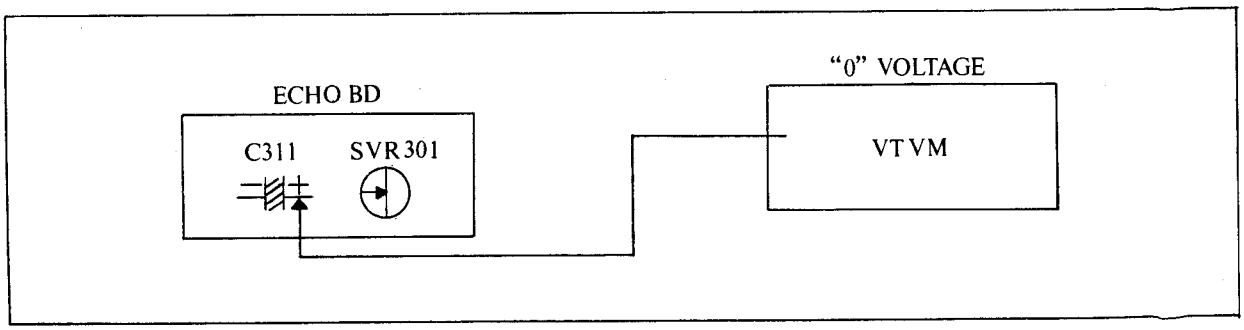

B. ADJUSTMENT

Adjust the SVR301 until the C311 + pin becomes "0" voltage.

Parts List

Ref No.	Parts No.	Description	Q'ty
4003515000 MAIN B'D			
IC302	2168007000	IC MN3008V MATSU	1
IC303	2168010102	IC MN3010V MATSU	1
IC301, IC304	2168220104	IC NJN 4558D JRC	2
Q301	2008606101	TR KTC732 NPN(BL)TM	1
Q802, Q804	2008606104	TR KTC1815 NPN KEC	2
D801, D802	2058106100	DIODE 1N 4002	4
D803, N804			
D301, D302	2058304100	DIODE CDG 24 FAIR	2
R329	3009391273	RES CF 390 1/4W JN	1
R326, R327	3009183273	RES CF 18K 1/4W JN	2
R804, R807	3009333273	RES CF 33K 1/4W JN	2
R802, R805	3009683273	RES CF 68K 1/4W JN	2
R330, R331	3009222273	RES CF 2.2K 1/4W JN	2
R324	3009102275	RES CF 1K 1/4W JR	1
R312	3009562275	RES CF 5.6K 1/4W JR	1
R307, R318	3009333275	RES CF 33K 1/4W VR	2
R391, R311	3009473275	RES CF 47K 1/4W JR	4
R313 R301			
R328	3009272275	RES CF 2.7K 1/4W JR	1
R305, R306	3009563275	RES CF 56K 1/4W JR	6
R314, R315			
R321, R322			
R317	3009823275	RES CF 82K 1/4W JR	1
R303, R309	3009104275	RES CF 100K 1/4W JR	4
R310, R316			
R302, R304	3009124275	RES CF 120K 1/4W JR	4
R308, R320			
R319	3009224275	RES CF 220K 1/4W JR	1
R323, R325	3009155275	RES CF 1.5M 1/4W JR	2
R801	3039100472	RES MO 10 1W J	1
R803, R806	3039152472	RES MO 1.5K 1W J	2
SVR301	3248310320	RES SEMI CS10KB 10/5	1
C311, C317	3409222871	CAP E 0.22μF 50V	2
C301, C303	3409233971	CAP E 3.3μF 50V	6
C308, C323			
C316, C326			
C322	3409247041	CAP E 47μF 25V	1
C801	3409210161	CAP E 100μF 35V	1
C304, C307	3509221130	CAP C 220PF 50V	2
C321	3509104530	CAP C 0.1μF 50V	1
C315	3509821130	CAP C 820PF 50V	1
C312	3609182120	CAP M 0.0018μF 100VJ	1
C320	3609222120	CAP M 0.0022μF 100V J	1
C313, C314	3609472120	CAP M 0.0047μF 100V J	2
C305, C306	3609332120	CAP M 0.0033μF 100V J	3
C302			
C318	3609682120	CAP M 0.0068μF 100V J	1
C309	3609102120	CAP M 0.001μF 100V J	2
RLY1, RLY2	5528001150	RELAY VB-24MB 24V DC TAKAMI	2
C802, C803	354933001	CAP C 0.033μF 250V AC W/RES	4
C804, C805			
VR401	3238002010	SLIDE VR 60L 10KA×1	1
VR304	3208015010	VR φ16 5KA×1K 20	1
VR303	3208016010	VR φ16 10KB×1K20	1
VR302	3208007070	VR φ16 50KB×1K20	1

Ref No.	Parts No.	Description	Q'ty
4003514900 MONITOR B'D			
IC902	2168630996	IC 7818	1
IC 901	2168630997	IC 7918	1
Q601L	2008206999	TR KTA 200 KEC	2
Q602L, Q602R	2008606100	TR KTC 200 KEC	2
Q603L, Q603R	2008606101	TR KTC 732 (BL) TM	2
Q701	2008606104	TK KTC 1815 KEC	1
Q702	2008206105	TR KTA 1015 KEC	1
D901, D902	2058106100	DIODE 1N4002	8
D903, D904			
D905, D906			
D908, D909			
D601L, D601R	2058304100	DIODE CDG24 FAIR	2
D907	2058514109	ZENER UZ-15BH	1
R904, R905	3009561273	RES CF 560 1/4W JN	2
R609L	3009100273	RES CF 10 1/4W JN	1
R601L	3009102273	RES CF 1K 1/4W JN	1
R603L	3009104273	RES CF 100K 1/4W JN	1
R903	3009562273	RES CF 5.6K 1/4W JN	1
R709	3009224273	RES CF 220K 1/4W JN	1
R609R	3009100275	RES CF 10 1/4W JR	1
R607L, R607R	3009330275	RES CF 33 1/4W JR	4
R608L, R608R			
R707	3009476275	RES CF 47 1/4W JR	1
R610L, R610R	3009101275	RES CF 100 1/4W JR	2
R604L, R604R	3009220275	RES CF 220 1/4W JR	2
R710, R711	3009153275	RES CF 15K 1/4W JR	2
R601R	3009102275	RES CF 1K 1/4W JR	1
R605L, R605R	3009152275	RES CF 1.5K 1/4W JR	2
R708, R701	3009472275	RES CF 4.7K 1/4W JR	2
R702, R703	3009103275	RES CF 10K 1/4W JR	2
R704, R706	3009823275	RES CF 82K 1/4W JR	2
R705, R603R	3009104275	RES CF 100K 1/4JR	2
R602L, R602R	3009393275	RES CF 39K 1/4W JR	2
R901, R902	3203910572	RES MO 10 2W J	2
C601L, C601R	3409210971	CAP E 1μF 50V	2
C603L, C603R	3409247941	CAP E 47μF 25V	2
C702	3409210041	CAP E 10μF 25V	1
C903, C904	3409222141	CAP E 220μF 25V	2
C604L, C604R	3409247121	CAP E 470μF 10V	2
C908, C097	3409210261	CAP E 1000μF 35V	2
C909, C910	3409247161	CAP E 470μF 35V	2
C602L, C602R	3509470130	CAP C 47P 50V	2
C905, C906	3509104530	CAP C 0.1μF 50V	2
VR401	3238002010	SLIDE VR 60L 10KA×1	1
VR601L(R)	3208098410	VR φ16 10KA×2K20	1
S701	3208097510	SWITCH ROTARY SRZ 046	1
S702	4608001210	SWITCH SRBU 5059A	1
PAONES OUT	4438001110	PHONE JACK STEREO	1
4003514800 METER B'D			
IC502a～502d	2138050984	IC KA 2281 SAMSUNG	4
D501a～501d	2058514109	ZENER UZ-15BH	4
POWER LED	2308999910	LED RED φ3	1

Parts List

Ref No.	Parts No.	Description	Q'ty
LEDa.b.c.d8～ LEDa.b.c.d10	2308220155	LED RED SCB-55 ROHM	12
LEDa.b.c.d1～ LEDa.b.c.d6	2308220355	LED GREEN SCB-55 ROHM	24
LEDa.b.c.d7	2308220555	LED YELLOW SCB-55 ROHM	4
R508 a.b.c.d～ R510a.b.c.d	3009572273	RES CF 5.6K ¼W JN	12
R507a.b.c.d	3009332273	RES CF 3.3K ¼W JN	4
R501a.b.c.d～ R506a.b.c.d	3009392273	RES CF 3.9K ¼W JN	24
R514a, R514b R514c, R514d	3009183273	RES CF 18K ¼W JN	4
R511a, R511b R511c, R511d	3009223273	RES CF 22K ¼W JN	4
R513a,b,c,d R515a,b,c,d	3009273273	RES CF 27K ¼W JN	8
R512a, R512b R512c, R512d	3009333273	RES CF 33K ¼W JN	4
R516a, R516b R516c, R516d	3009153273	RES CF 15K ¼W JN	4
R517a, R517b R517c, R517d	3039471472	RES MO 470 1W JN	4
C501a, C501b C501c, C501d	3409247971	CAP E 4.7μF 50V	4
C502a, C502b C502c, C502d	3409222071	CAP E 22μF 50V	4

4003514810 EFX SUB B'D

IC001	2168220104	IC 4558D	1
R003, R004	3009102273	RES CF 1K ¼W JN	2
R006, R007	3009124273	RES CF 120K ¼W JN	2
R005	3009222275	RES CF 2.2K ¼W JR	1
R001	3009823275	RES CF 82K ¼W JR	1
C001	3409222871	CAP E 0.22μF 50V	1
C004	3409210041	CAP E 10μF 25V	1
C003	3509509030	CAP C 5PF 50V	1
SEND,RETURN	4438001110	JACK PL55 STEREO	2

4003515600 RIGHT SUB B'D

IC401, IC402 IC403	2168220110	IC 5532D	3
FET401 FET402, FET403	2018207110	FET NCH 2SK30	3
R401, R402	3009560273	RES CF 56 ¼W JN	2
R400, R404 R414, R415 R444, R445	3009101273	RES CF 100 ¼W JN	6
R405 R424, R423	3009102273	RES CF 1K ¼W JN	3
R417	3009132273	RES CF 1.3K ¼W JN	1
R416	3009183273	RES CF 18K ¼W JN	1
R406	3009562273	RES CF 5.6K ¼W JN	1
R408, R420 R426	3009103273	RES CF 10K ¼W JN	3
R442, R443	3009223273	RES CF 22K ¼W JN	2
R412, R403	3009273273	RES CF 27K ¼W JN	2

Ref No.	Parts No.	Description	Q'ty
R418	3009333273	RES CF 33K ¼W JN	1
R413	3009472273	RES CF 47K ¼W JN	1
R410, R422 R428, R432	3009224273	RES CF 220K ¼W JN	4
R409, R421 R427	3009335273	RES CF 3.3M ¼W JN	3
R431	3009224275	RES CF 220K ¼W JR	1
C406, C417 C408, C412 C416, C414 C418, C415 C441	3409222041	CAP E 22μF 25V	9
C405, C409c C411	3409247941	CAP E 4.7μF 25V	3
C420, C403 C413, C401	3409247041	CAP E 47μF 25V	4
C416, C410 C415, C400	3509101130	CAP C 100PF 50V	4
C402, C404	3509104530	CAP C 2.1μF 50V	2
VR402R	3238002010	SLIDE VR 60L 10KA×1	1
VR441	3208026010	VR φ16 10KA×1K20	1
VR442	3228099510	VR φ16 10KA×2K20	1

4003515600 LEFT SUB B'D

IC401, IC402 IC403	2168220110	IC 5532D	3
FET401, FET402 FET403	2018207110	FET NCH 2SK30	3
R401, R402	3009560273	RES CF 56 ¼W JN	2
R400, R404 R414, R415 R444, R445	3009101273	RES CF 100 ¼W JN	6
R405, R403 R424, R423	3009102273	RES CF 1K ¼W JN	4
R417	3009132273	RES CF 1.3K ¼W JN	1
R416	3009183273	RES CF 18K ¼W JN	1
R406	3009562273	RES CF 5.6K ¼W JN	1
R408, R420 R426	3009103273	RES CF 10K ¼W JN	3
R442, R443	3009223273	RES CF 22K ¼W JN	2
R412	3009273273	RES CF 27K ¼W JN	1
R418	3009333273	RES CF 33K ¼W JN	1
R413	3009473273	RES CF 47K ¼W JN	1
R410, R422 R428, R432	3009224273	RES CF 220K ¼W JN	4
R409, R421 R427	3009335273	RES CF 3.3K ¼W JN	3
R431	3009224275	RES CF 220K ¼W JR	1
R430	3009102275	RES CF 1K ¼W JR	1
C406, C407 C408, C412 C416, C414 C418, C415 C441	3409222041	CAP E 22μF 25V	9
C405, C409c C411	3409247941	CAP E 4.7μF 25V	3

Parts List

Ref No.	Parts No.	Description	Q'ty
C415, C420	3409247041	CAP E 47μF 25V	5
C403, C413			
C401			
C416, C410	3509101130	CAP C 100PF 50V	4
C415, C400			
C402, C404	3509104530	CAP C 2.1μF 50V	2
VR402L	3238002010	SLIDE VR 60L 10KA×1	1
VR441	3208026010	VR φ16 10KA×1K20	1
VR442	3228099510	VR φ16 10KA×2K20	1
4003515401 INPUT BLANCE B'D			
IC101	2168220104	IC NJM 4558D	6
Q101, Q102	2008206104	TR 2SA 970BL KEC	12
Q103	2008613000	TR 2SD1111	6
D101, D102	2058106100	DIODE 1N4002	24
D103, D104			
D105	2058304100	DIODE CDG24 FAIR	6
LED101	2308999910	LED RED φ3	1
FB101, FB102	2648699990	CHOCK COIL	12
R108	3009270273	RES CF 27 ¼W JN	6
R128, R129	3009101273	RES CF 100 ¼W JN	24
R130, R137			
R107	3009471273	RES CF 470 ¼W JN	6
R116	3009681273	RES CF 680 ¼W JN	6
R135, R136	3009560273	RES CF 56 ¼W JN	12
R114, R115	3009102273	RES CF 1K ¼W JN	12
R117, R118	3009122273	RES CF 1.2K ¼W JN	12
R126	3009182273	RES CF 1.8K ¼W JN	6
R110, R111	3009222273	RES CF 2.2K ¼W JN	12
R103, R104	3009682273	RES CF 6.8K ¼W JN	12
R105, R109	3009472273	RES CF 4.7K ¼W JN	24
R112, R113	3009103263	RES CF 10K ¼W JN	18
R127			
R121	3009153273	RES CF 15K ¼W JN	6
R131, R133	3009223273	RES CF 22K ¼W JN	18
R134			
R106	3009332273	RES CF 3.3K ¼W JN	6
R100, R101	3009333273	RES CF 3.3K ¼W JN	12
R122, R124	3009224273	RES CF 220K ¼W JN	12
R125	3009123273	RES CF 12K ¼W JN	6
R123	3009105273	RES CF 1M ¼W JN	6
R132	3009823273	RES CF 82K ¼W JN	6
C100, C127	3409201071	CAP E 1μF 50V	12
C113, C121	3409222041	CAP E 22μF 25V	12
C103, C104	3409247041	CAP E 47μF 25V	24
C124, C126			
C108	3409247131	CAP E 470μF 16V	6
C111, C112	3509151130	CAP C 150PF 50V	18
C120			
C114	3509331130	CAP C 330PF 50V	6
C105, C196	3509561130	CAP C 560PF 50V	12
C101, C102	3509102130	CAP C 0.001μF 50V	12
C123, C126 5	3509104530	CAP C 0.1μF 50V	12
C122	3609473120	CAP M 0.047μF 100V J	6
C116	3609103120	CAP M 0.01μF 100V J	6
C117	3609123120	CAP M 0.012μF 100V J	6
C119	3609153120	CAP M 0.015μF 100V J	12

Ref No.	Parts No.	Description	Q'ty
C115	3609562120	CAP M 0.0056μF 100V J	6
SVR104	3238002010	SLIDE VR 60L 10KA×2	6
VR101, VR102	3228097310	VR φ16 50KB×1K20	18
VR103			
VR105, VR106	3208026010	VR φ16 10KA×1K20	12
VR107	3228099510	VR φ16 10KB×2K20	6
SW101	4608099110	SWITCH ROTARY SRZ043	6
4003515701 INPUT STEREO B'D			
IC202, IC203	2168220104	IC NJM 4558D	4
IC201	2168205995	IC KIA 7359P KEC	2
Q201	2008613000	TR 2SD1111	2
D101, D102	2058304100	DIODE CDG24 FAIR	4
LED201	2308999910	LED RED φ3	2
Q803, Q804	2408000197	PHOTO INTERRUPTER ROHM RPR-35PF	2
R234, R235	3009560273	RES CF 56 ¼W JN	8
R228K	309101273	RES CF 100 ¼JN	2
R218C, R218R	3009681273	RES CF 680 ¼W JN	4
R212L, R212R	3009102273	RES CF 1K ¼W JN	4
R214R	3009222273	RES CF 2.2K ¼W JN	2
R219R, R221R	3009122273	RES CF 1.2K ¼W JN	4
R227	3009182273	RES CF 1.8K ¼W JN	2
R220R, R220L	3009472273	RES CF 4.7K ¼W JN	8
R222R, R222L			
R223L, R223R	3009822273	RES CF 8.2K ¼W JN	4
R233L, R233R	3009223273	RES CF 22K ¼W JN	4
R204L	3009104273	RES CF 100K ¼W JN	2
R226	3009224273	RES CF 220K ¼W JN	2
R224	3009184273	RES CF 180K ¼W JN	2
R225	3009105273	RES CF 1M ¼W JN	2
R208L, R208R	3009682275	RES CF 6.8K ¼W JR	4
R232L, R232R	3009823275	RES CF 82K ¼W JR	4
R205L, R205R	3009181275	RES CF 180 ¼W JR	4
R202L, R202R	3009101275	RES CF 100 ¼W JR	14
R229L, R229R			
R230L, R230R			
R228R			
R215L, R215R	3009102275	RES CF 1K ¼W JR	8
R216L, R216R			
R219L, R221L	3009122275	RES CF 1.2K ¼W JR	4
R231L, R231R	3009223275	RES CF 22K ¼W JR	4
R214L	3009222275	RES CF 2.2K ¼W JR	2
R203L, R203R	3009104275	RES CF 100K ¼W JR	10
R206L, R206R			
R204R			
R201L, R201R	3009154275	RES CF 150K ¼W JR	4
R207L, R207R	3009183275	RES CF 18K ¼W JR	4
C201L, C201R	3409201071	CAP E 1μF 50V	4
C205L, C205R	3409222041	CAP E 22μF 25V	12
C200L, C200R			
C218L, C218R			
C207L, C207R	3409247041	CAP E 47μF 25V	8
C221, C223			
C202L, C202R	3409233041	CAP E 33μF 25V	4
C209L, C209R	3509560130	CAP C 56PF 50V	4
C204L, C204R	3509221130	CAP C 220PF 50V	4

Parts List

Ref No.	Parts No.	Description	Q'ty
C217L, C217R	3509101130	CAP C 100PF 50V	4
C211L, C211R	3509331130	CAP C 330PF 50V	4
C220, C222	3509104130	CAP C 0.1μF 50V	4
C203L, C203R C219	3609473120	CAP M 0.047μF 100V	6
C206C, C206R C213L, C213R	3609103120	CAP M 0.01μF 100V	8
C214L, C214R	3609123120	CAP M 0.012μF 100V	4
C215L, C215R C216L, C216R	3609123120	CAP M 0.033μF 100V	8
C212L, C212R	3609562120	CAP M 0.0056μF 100V	4
SVR201	3238098010	SLIDE VR 60L 10KA×2	2
VR202, VR203 VR204	3228099610	VR φ16 100KB×2K20	6
VR205, VR206	3208098410	VR φ16 10KA×2K20	4
SW201	4608001310	SWITCH ROTARY SRZ043	2
SW202	4625999010	SWITCH PUSH	2
PRIMARY FUSE	5508211630	NB 31.8mm 0.5A/250V KS (FOR KS)	1
PRIMARY FUSE	5508211633	NB 31.8 mm 0.5A/250V UL.CSA (FOR UL,CSA)	1
PRIMARY FUSE	5508301134	TL 20mm 0.2A/250V SEMKO (FOR G.EUROPE)	1
PRIMARY FUSE	5508301134	TL 20mm 0.2A/250V SEMKO (FOR BSI)	1

Top View of P.C. Boards

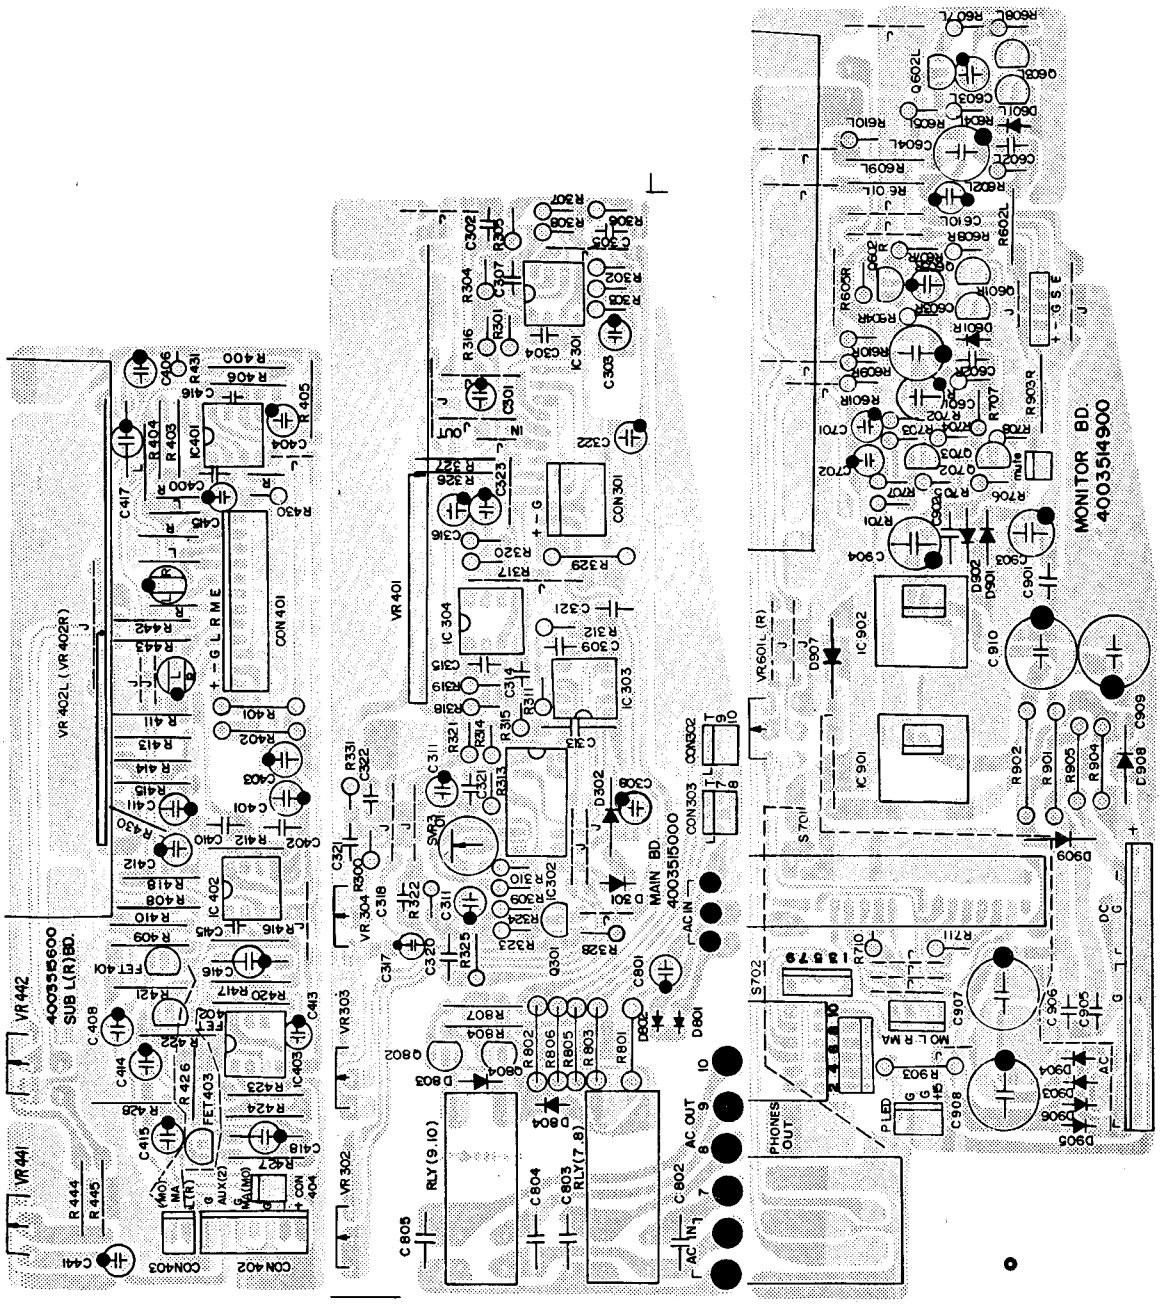

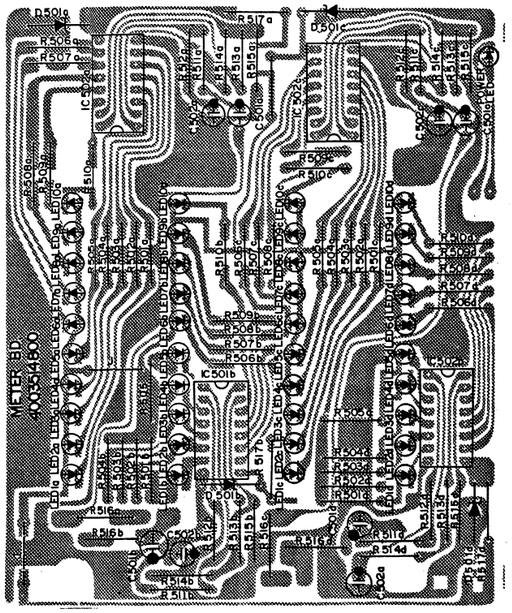



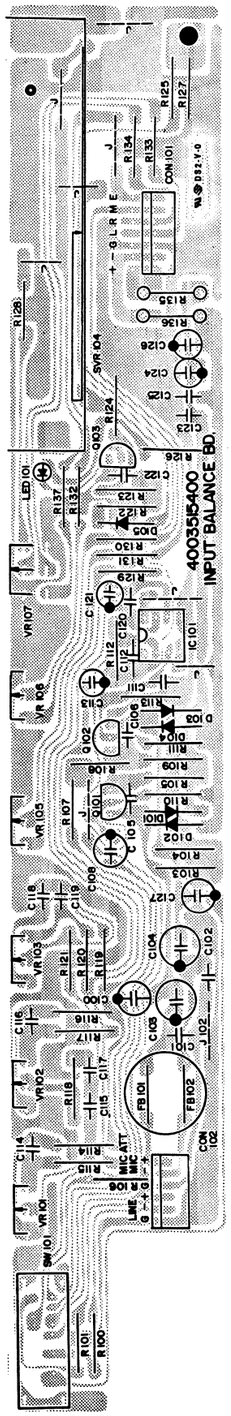

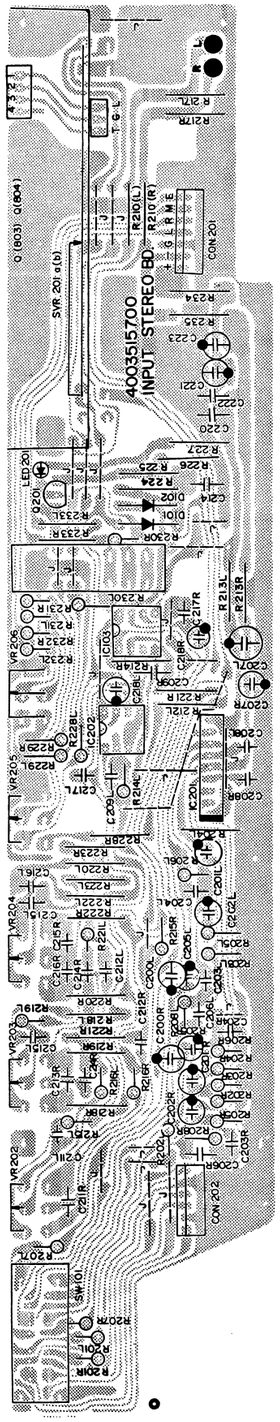

Parts List According to Exploded View

No.	Description	Parts No.	Q'ty	Remark
1	PANEL FRONT	048601999401	1	
2	BOTTOM COVER	6122493110	1	
3	BACK CHASSIS	046102993801	1	FOR KS
3-1	BACK CHASSIS	046102993841	1	FOR UL CSA
3-2	BACK CHASSIS	046102993831	1	FOR G·EUROPE
3-3	BACK CHASSIS	046102993821	1	FOR BSI
4	FRAME SIDE(L)	046122493801	1	
5	FRAME SIDE(R)	046122493821	1	
6	WOOD SIDE(L)	6122494110	1	
7	WOOD SIDE(R)	6122494120	1	
8	DISPLAY WINDOW	048575998601	1	
9	PCB METER	4003514800	1	
10	POWER TRANSFORMER	0828094100	1	
11	PCB MONITOR	4003514900	1	
12	PCB MAIN	4003515600	1	
13	PCB SUB LEFT(RIGHT)	4003515600	1	
14	PCB INPUT(SPEREO)	4003515700	2	
15	PCB INPUT(BALANCE)	4003515400	6	
16	SLIDE SPONG E	6735997610	12	
17	WASHER THD IN ϕ10Y	8329100011	1	
18	WASHER THD IN ϕ7Y	8329070011	63	
19	MIC JACK	4438000110	1	
20	STUD	6535001360	4	
21	SCREW BM3× 5Y	8009130051	4	
22	SCREW BTC 3× 6B	8109330063	2	
23	WASHER CABINET	6305000520	4	
24	SCREW BM4× 35B	8009140353	4	
25	FOOT RUBBER	6355000410	4	
25	FOOT RUBBER	6355000410	4	
26	SCREW BTC 3× 8B	8109330083	4	
27	SCREW BTC 3× 6B	8109330063	12	
29	SCREW PM 3× 6B	8019130063	4	
30	SLIDE VR KNOB	048542999821	4	
31	SLIDE VR KNOB	048542999801	8	
32	CONTROL KNOB	048542999921	33	
33	CONTROL KNOB	048542999901	31	
34	CONTROL KNOB CAP	048543999201	27	
35	CONTROL KNOB CAP	048543999221	9	
36	CONTROL KNOB CAP	048543999231	10	
37	CONTROL KNOB CAP	048543999241	9	

No.	Description	Parts No	Q'ty	Remark
38	CONTROL KNOB CAP	048543999251	9	
39	PUSH KNOB	048545998520	2	
440	POWER SWITCH	4625999410	1	
41	PHONO JACK	4438000120	8	
42	SELECTOR SWITCH	4618000410	1	FOR KS
43	RCA JACK	4438099310	1	
44	NUT M3	8209130011	2	
45	PCB BRACKET	6505991310	3	
46	SCREW BM 3× 6Y	8009130061	6	
47	PCB JACK	4003515500	1	
48	PHONE JACK	4438000110	8	
49	SYSTEM GND	4463100210	1	
50	CANON JACK	4358999510	2	
51	SCREW RF 3× 8N	8009130084	4	
52	FUSE HOLDER	4458000210	1	FOR UL.CSA
52-1	FUSE HOLDER	4458000110	1	FOR G.EUROPE
52-2	FUSE HOLDER	4458000220	S	FOR KS
53	SCREW TERMINAL 3P	4408198713	1	
54	SCREW WPTC 3× 14B	8159230143	2	
55	SEL SWITCH HOLDER	6515000630	1	FOR KS
56	SCREW BM 3× 8B	8009130083	2	
57	SCREW BM 3× 6B	8109330063	3	
58	STOPPER CORD	6513000310	1	FOR KS
58-1	CORD STOPPER	6518000710	1	FOR UL, CSA
58-2	CORD STOPPER	6518000111	1	FOR G.EUROPE
58-3	CORD STOPPER	6513000210	1	FOR BSI
59	AC OUTLET	4448100410	2	FOR KS
59-1	AC OUTLET	4448100210	2	FOR UL, CSA
59-2	AC OUTLET	4448100420	2	FOR G.EUROPE
59 3	AC OUTLET	4448999710	2	FOR BSI
60	AC CORD	4308000810	1	FOR KS
60-1	AC CORD	4308001010	1	FOR UL,CSA
60-2	AC CORD	4308000430	1	FOR G.EUROPE
60-3	AC CORD	4338000110	1	FOR BSI
61	ADAPTOR AC CORD	4428300119	1	FOR KS
62	NUT M4	8209140011	2	
63	WASHER THD IN ϕ4Y	8329040011	2	
64	LUG SOLDER	4365999910	1	
65	SCREW BM 4× 12B	8009140123	1	

Exploded View of Cabinet & Chassis

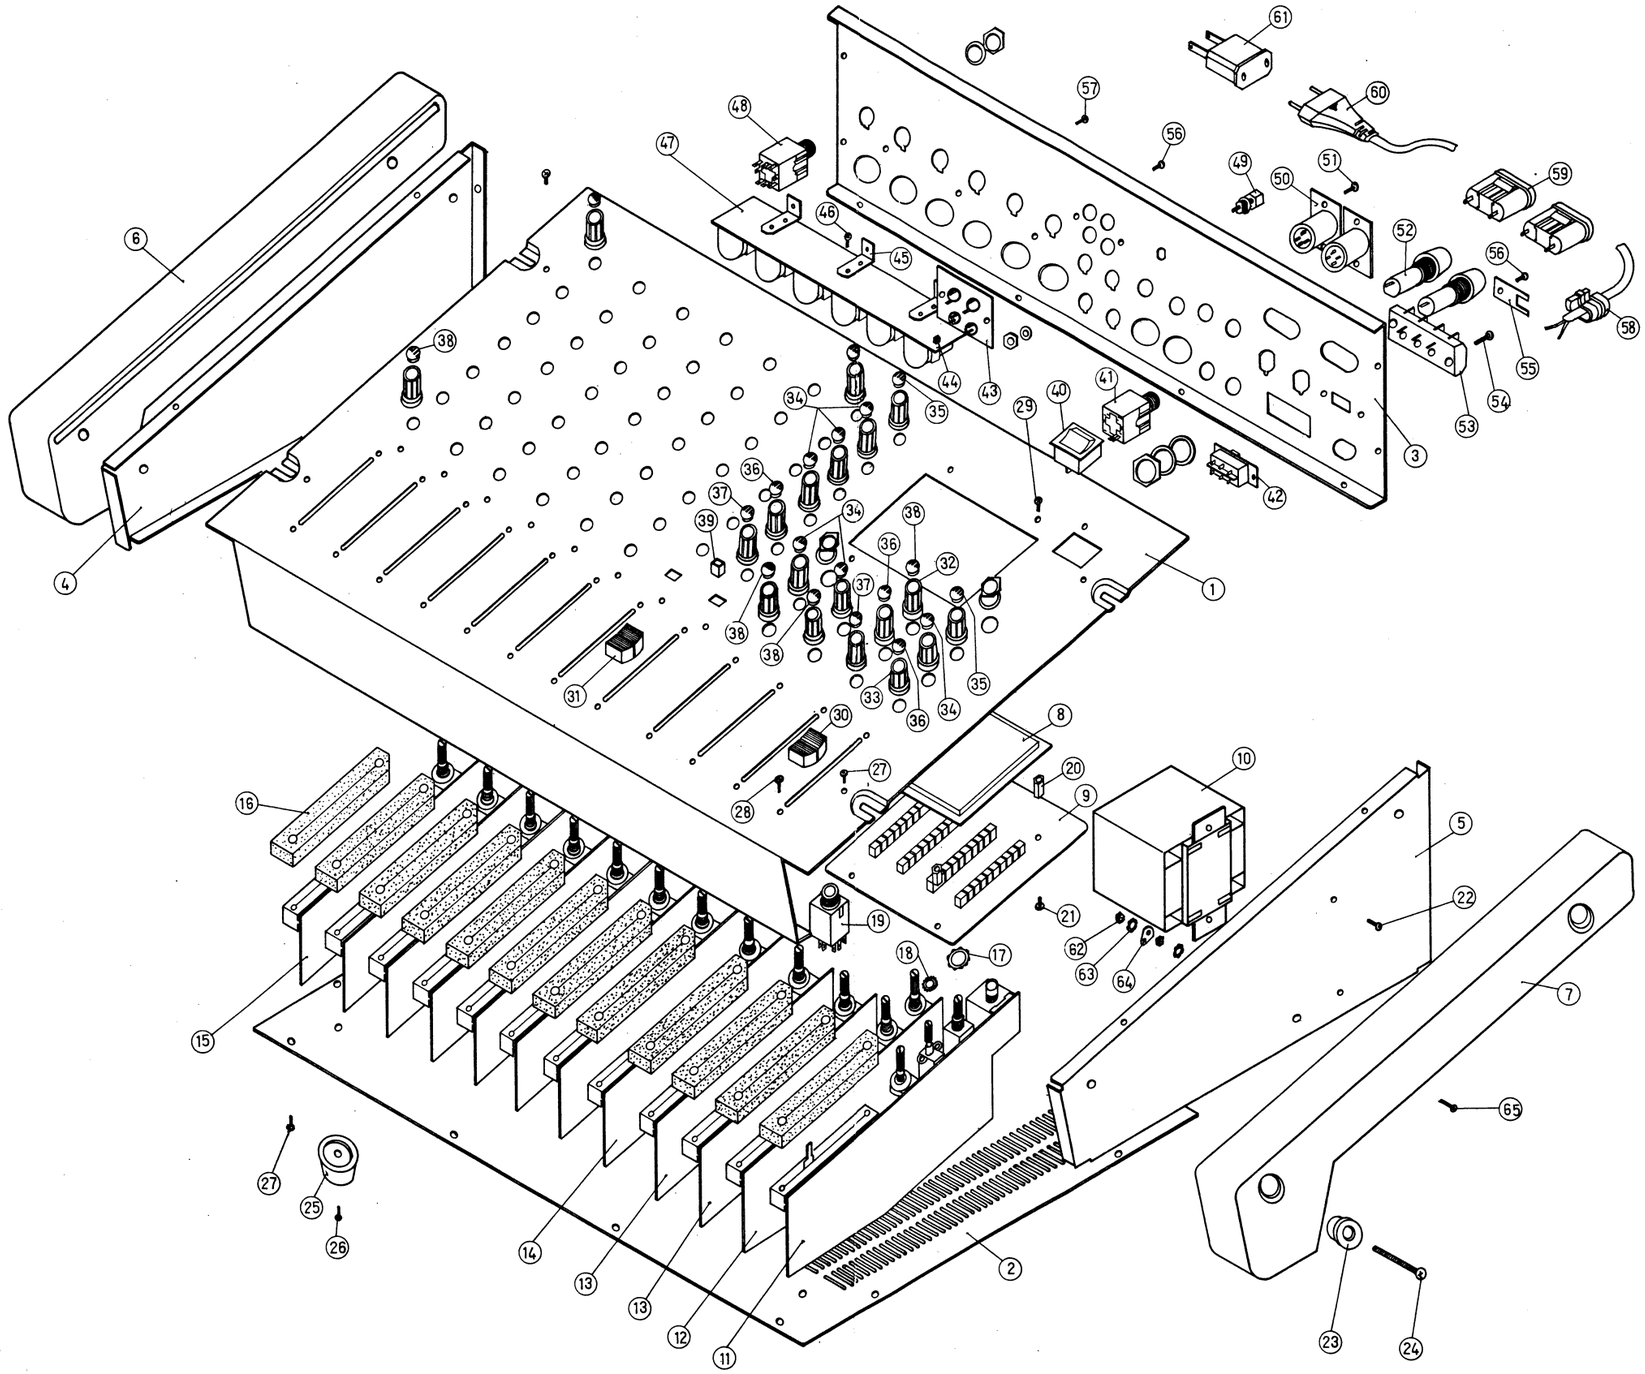

Schematic Diagram

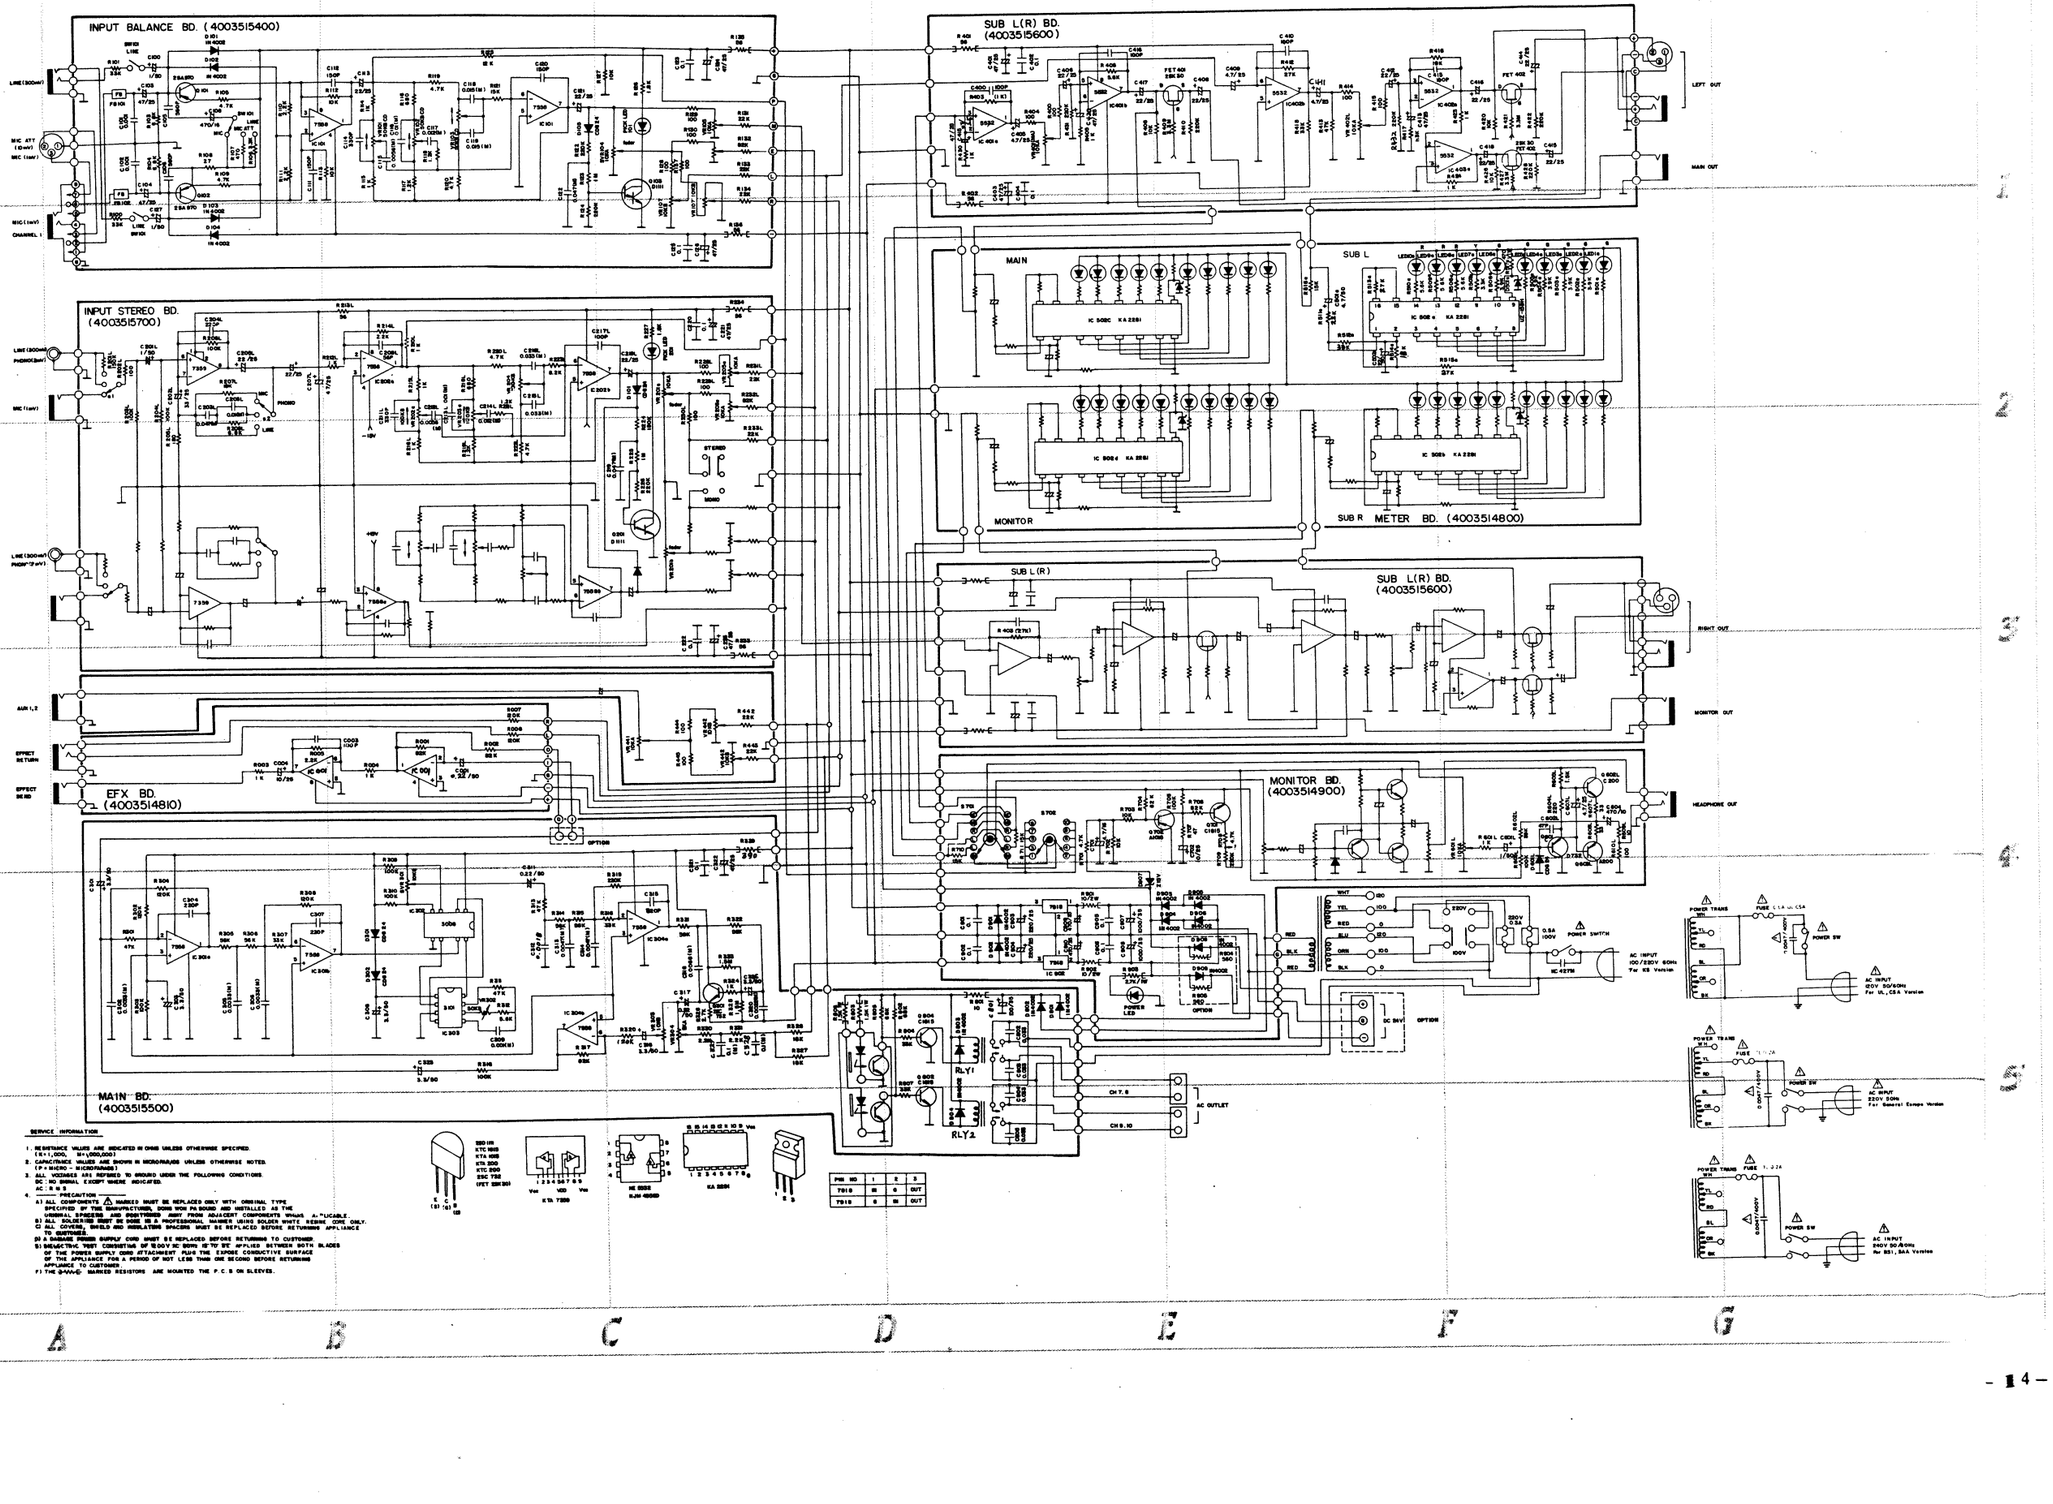

Block Diagram